AUTOMATIC HAND DRYER

CODE 01481.S

Automatic electronic hand dryer



- Automatic electronic hand dryer.
- Model for mounting on the surface.
- Stainless steel sheet housing, satin finish. Also available in polish finish (NOFER 01481.B), white finish (NOFER 1481.W), black finish (NOFER 01481.N) and white ABS (NOFER 01491.W).
- Optional Hepa filter.
- Suitable for collectivities and designed for high traffic bathroom and continuous use.
- Robust, anti-vandal and safe because it is built without sharp edges or other dangerous elements.
- In accordance with European safety directives (EC).

TECHNICAL DATA

- Housing made of a single piece of AISI 304 stainless steel satin finish, 1,2 mm thick.
- Electronic infrared sensor that stops the function when the hands leave the active range.
- Air temperature (room temperature of 20ºC): 60 ºC.
- Universal motor without brushes (maintenance not needed).
- Motor speed: 2800 r.p.m.
- Air speed: 65 km/h.
- Air flow: 2300 l/min.
- Total power: 2050 W (optional 1450 W).
- Motor power: 110 W.
- Voltage/Frequency: 220-240 V ~ 50/60 Hz.
- Electrical isolation: Class II.
- Distance to the sensor: 10-50 cm (with possibility of regulation).
- Maximum consumption: 9 A.
- Noise level from 2 meters: 60 dBA.
- Protection index: IPX1.
- Dimensions: 284 height x 218 width x 102 depth (mm).
- Net weight: 2,73 kg.
- With safety thermal limiter and automatic stoppage due to vandalism.
- Function: place your hands under the appliance. The hand dryer will start automatically and it continues working while the hands are within the active range. The device switches off after a few seconds of removal.
- Cleaning: stainless steel needs maintenance because dust can eventually damage the chromium (Cr) content in stainless steel. We recommend monthly cleaning with a stainless steel special cleaner.
- estimated drying time: 40 seconds. Adjustable time by potentiometer from 0 to 90 seconds.

SUGGESTED TEXT FOR PRESCRIPTION

NOFER hand dryer, with AISI 304 stainless steel housing, satin finish, hot air driven with electronic sensor, 2050 W power and temperature of 60ºC. Speed motor: 2800 r.p.m. Dimensions: 284 height x 218 width x 102 depth (mm).

NOFER S.L.
Ctra. Laureà Miró, 385-387
08980 · Sant Feliu de Llobregat (Barcelona)
Tel +34 934 742 423 · Fax +34 934 743 548
nofer@nofer.com · www.nofer.com

Related Products

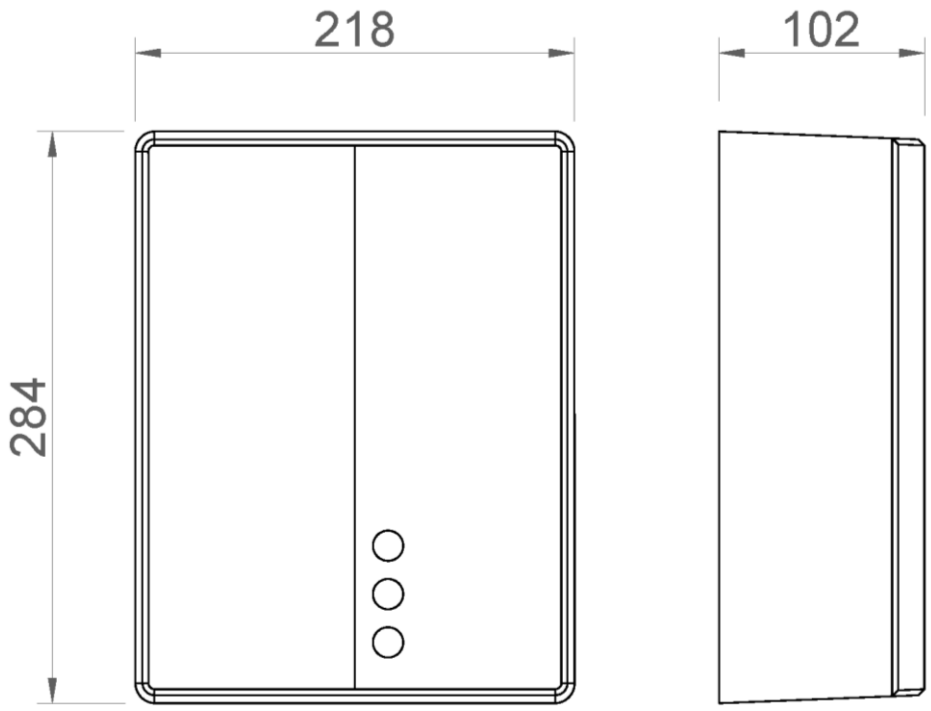

01481.B


01481.W


01600.S


01491.W

TECHNICAL DRAWING



DIMENSIONS IN mm

NOFER S.L.
Ctra. Laureà Miró, 385-387
08980 · Sant Feliu de Llobregat (Barcelona)
Tel +34 934 742 423 · Fax +34 934 743 548
nofer@nofer.com · www.nofer.com