HAND DRYER – SOAP DISP. - TAP

CODE 01901.B

Set with hand dryer, soap dispenser and tap



- Countertop set with hand dryer, soap dispenser and tap with laser sensor.
- Anodized forged aluminum set, polish finish. Also available in black finish (NOFER 01901.N), gold finish (NOFER 01901.GD) and silver finish (NOFER 01901.S).
- Timeless design adaptable to any type of decoration.
- Robust and safe to be built without sharp edges or other dangerous elements.
- Durability and resistance to corrosion.
- Suitable for collectivities and places of high frequency of use.
- In accordance with the European directives of electrical safety and electromagnetic compatibility (CE).

SUGGESTED TEXT FOR PRESCRIPTION

NOFER countertop set with hand dryer, soap dispenser and tap activated with electronic laser sensor and adjustable sensitivity. Made in anodized forged aluminum, satin finish. Independent control module with ABS plastic housing. 1200 W, 220-240 V, 50 Hz. Universal hand dryer motor speed 32000 r.p.m. Faucet with NEOPERL aerator of 1,89 l/min of flow. Soap dispenser with 2 liter tank and adjustable dosage. Modern design, robust and resistance to corrosion. Suitable for collectivities and places of high frequency of use. Tap dimensions: 225 height x 230 width x 251,5 depth (mm). Dimensions control module: 307 height x 281,4 width x 210 depth (mm). Made by NOFER, S.L.

TECHNICAL DATA

DISPENSER / TAP	
BOX DIMENSIONS	300 X 480 X 340 mm
BOX WEIGHT	2,6 kg
TAP DIMENSIONS MODEL 'HIGH' (assembled)	317,5 X 230 X 268 mm
TAP DIMENSIONS MODEL 'LOW' (assembled)	225 X 230 X 251,5 mm
TAP WEIGHT MODEL 'HIGH'	2,5 kg
TAP WEIGHT MODEL 'LOW'	2,3 kg
INSTALLATION	ON COUNTER DESK (SINK)
SINK REQUIRED HOLE DIAMETER	Ø35 mm
MATERIALS	
Colon	Extruded 6063 T5 aluminium. Averaged thickness 5 mm
Wheel base	Brigh PC plastic. Averaged thickness 3 mm.
wheel cover	Forged 6063 T5 aluminium. Averaged thickness 2.5 mm
Water pipe	EPDM (food grade) covered with stainless steel mesh.
Fittings	Chrome plated CW508L (EN 1652) brass
FINISHINGS	
01901.B	Chrome plated according with EN248 standards
01901.S	Sandblasting. Natural anodized 18 microns thickness (ISO 15184 / ISO 9227/ ISO 1134)
01901.N	Sandblasting. Black anodized 20 microns thickness (ISO 15184 / ISO 9227/ ISO 1134)
01901.GD	Sandblasting. Gold anodized 20 microns thickness (ISO 15184 / ISO 9227/ ISO 1134)
ACTIVATION	LASER SENSORS. SENSIBILITY CAN BE REGULATED
SENSOR SENSIBILITY	FROM 5 TO 23 CM (FACTORY SETUP: 8 cm)
WATER FLOW (WITH SPRAY SLIM AREATOR)	1.89 l/m (3 Bar) - ENCLOSED ALTERNATIVE: 5 l/min (3 Bar)
AREATOR	NEOPEARL
NOISE LEVEL AT 2m	65 dbA

NOFER S.L.
Ctra. Laureà Miró, 385-387
08980 · Sant Feliu de Llobregat (Barcelona)
Tel +34 934 742 423 · Fax +34 934 743 548
nofer@nofer.com · www.nofer.com

Related Products


01901.S


01901.BK


01901.GD

HAND DRYER – SOAP DISP. - TAP

CODE 01901.B


Set with hand dryer, soap dispenser and tap

TECHNICAL DATA


CONTROL MODULE	
BOX DIMENSIONS	400 X 350 X 290 mm
BOX WEIGHT	4 kg
CONTROL MODULE DIMENSIONS	307 X 281,4 X 210 mm
CONTROL MODULE WEIGHT (WITHOUT SOAP)	3,8 Kg
INSTALLATION	WALL MOUNTED OR FLOOR STANDING USING 'SILENTBLOCKS' (+50 mm in total heigh)
SET UP PARAMETERS	
CHECKING POGRAM	SENSOR OPERATION TEST
SOAP CIRCUIT PURGER PUSH BUTTON	INCLUDED
SOAP DOSAGE	FROM 0 TO 3 s. 0,1 s. STEPS
MAXIMUM HAND DRYER OPERATION TIME	FROM 0 A 30 s. 1 s. STEPS
MAXIMUM WATER SOLENOID VALVE OPERATION TIME	FROM 0 A 30 s. 1 s. STEPS
WATER TEMPERATURE REGULATION	WITH MIXER (INCLUDED)
SOAP AND WATER AUTOMATIC HYGIENE ACTIVATION	INCLUDED
COVER MATERIAL	ABS 3 mm AVERAGED THICKNESS
HAND DRYER BLOWER MATERIAL	ABS 3 mm AVERAGED THICKNESS
NOMINAL INTENSITY	5,3 A
VOLTAGE	220 V – 240 V~
STAND BY' CONSUMTION	0,009 A
ELECTRICAL ISOLATION	CLASS II
PROTECTION INDEX AGAINTS WATER AND DUST	IP34
HAND DRYER (INCLUDED AT CONTROL MODULE)	
POWER	1200 W
ELECTRICAL PROTECTION	SAFETY THERMAL LIMITER
VALDAL PROOF AUTOMATIC SWICTH OFF	YES - MAXIMUM OPERATION TIME 30 s
MOTOR TYPE	UNIVERSAL
HEPA FILTER	OPTIONAL
MOTOR SPEED	32000 r.p.m.
AIR TEMPERATURE	40ºC at 10 cm
AIR FLOW	1980 l/min
DRYING TIME	14 - 15 s.
SOAP DISPENSER (INCLUDED AT CONTROL MODULE)	
DOSAGE SYSTEM	PERISTALTIC PUMP
VOLTAGE	5 V
INTENSISTY	0,3 A
VISCOSITY	1500 - 3500 CPS
ACCEPTED SOAP DENSITY INTERVAL	0,8 - 1,2 KGM/DM3
MATERIAL DEPOSIT	PC. TRANSLUCENT BLACK
DEPOSIT CAPACITY	2 liters
WATER SOLENOID VALVE (INCLUDED AT CONTROL MODULE)	
MAXIMUM OPERATION PRESSURE	8 BAR
MINIMUM OPERATION PRESSURE	0,5 BAR
RECOMENDED OPERATION PRESSURE	3 BAR
WATER INLET FILTER SOLENOID VALVE	YES
VOLTAGE	5 V
CERTIFICATIONS	
SGS-CE	


NOFER S.L.
Ctra. Laureà Miró, 385-387
08980 · Sant Feliu de Llobregat (Barcelona)
Tel +34 934 742 423 · Fax +34 934 743 548
nofer@nofer.com · www.nofer.com


TECHNICAL DRAWING

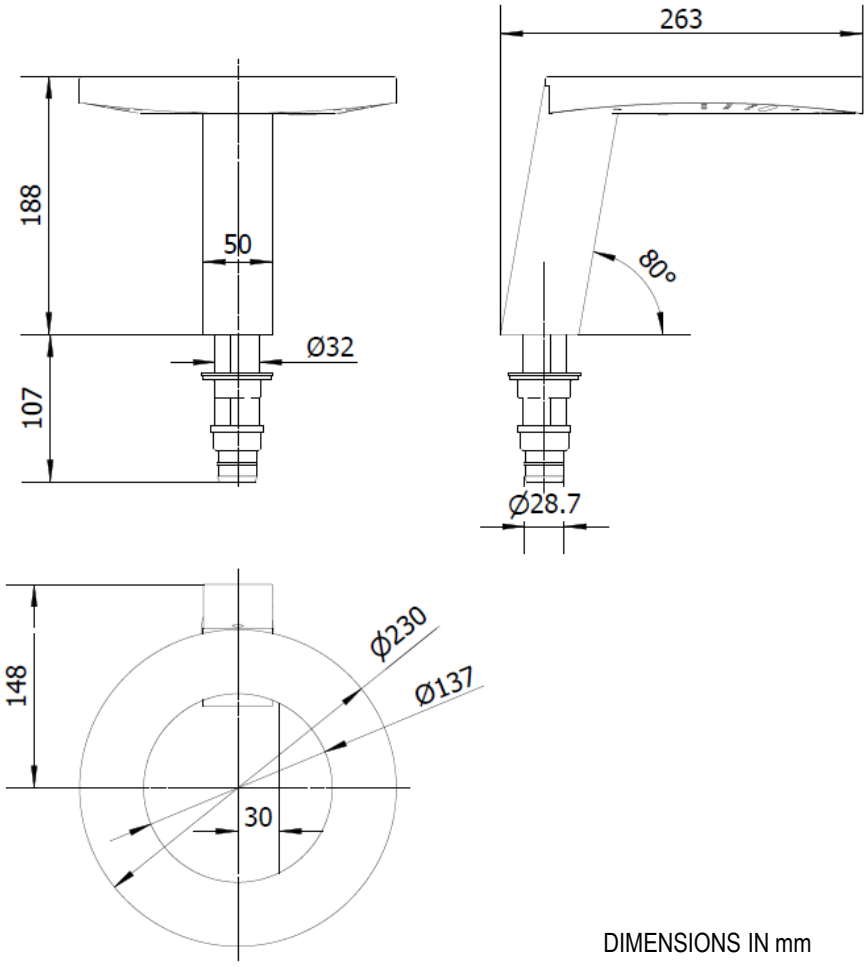


DIMENSIONS IN mm

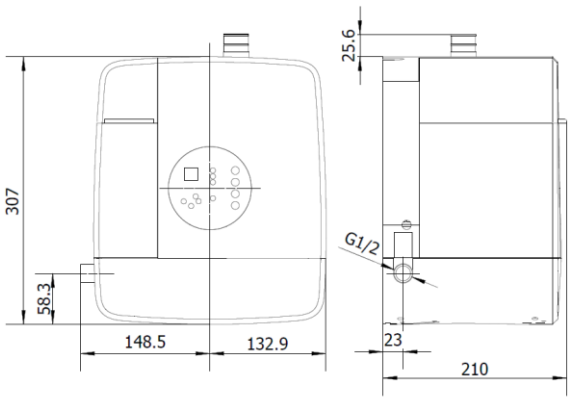



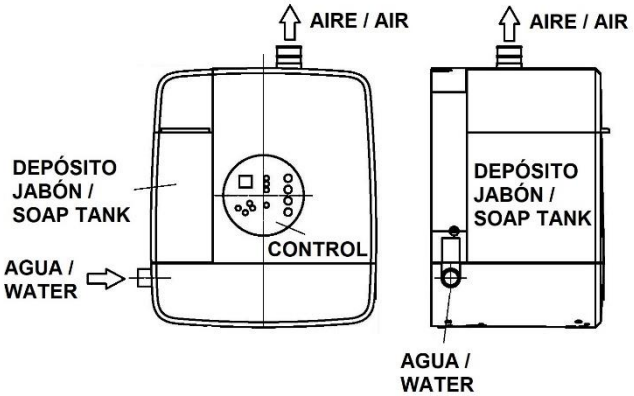

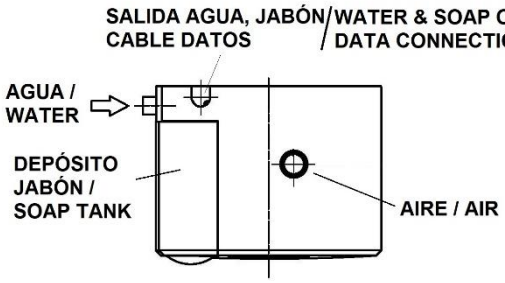

NOFER S.L.
Ctra. Laureà Miró, 385-387
08980 · Sant Feliu de Llobregat (Barcelona)
Tel +34 934 742 423 · Fax +34 934 743 548
nofer@nofer.com · www.nofer.com