



## CYCLON stainless steel hand dryer with electronic sensor. Satin finish

### Description

- height-end hand dryer with electronic sensor.
- Surface mounted model.
- Satin finish stainless steel sheet housing.
- Also available in polished finish (NOFER 01101.B) and white epoxy painted finish (NOFER 01101.W).
- Suitable for communities and places of very height frequency of use.
- Suitable for uninterrupted use. Top quality components.
- Robust, vandal-proof and safe as it is constructed without sharp edges or other dangerous elements.
- Conforms to European safety directives (CE).

### Suggested text for prescription

NOFER hand dryer, with AISI 304 stainless steel casing, satin finish, hot air driven by electronic sensor, 2450 W power and temperature of 53°C. Motor speed 6500 r.p.m. Dimensions: 240 height x 265 width x 210 depth (mm).

### Components

- One-piece AISI 304 stainless steel housing.
- Infrared electronic sensor that stops the hand dryer when hands are removed from the detection field.
- Overheating resistance thermostat (automatic reset).
- With safety thermal limiter and automatic shutdown in case of vandalism.

### Operation

Place your hands under the device. The hand dryer is automatically activated and remains in operation as long as the hands are within the sensor field. The device switches off a few seconds after the hands are removed.


### Cleaning

Cleaning with a cotton cloth slightly moistened in a soapy solution is recommended. Then dry.

### Technical characteristics

**Material:** 304 stainless steel  
**Finishing:** Satin  
**Thickness:** 1.2 mm  
**Air outlet temperature:** at an ambient temperature of 20°C, temperature: 53°C at 10 cm.  
**Motor type:** Universal  
**Motor speed:** 6500 rpm.  
**Air velocity:** 117 km/h  
**Air flow rate:** 5500 l/min  
**Total power:** 2450 W  
**Engine power:** 250 W  
**Voltage/Frequency:** 220-240 V - 50/60 Hz  
**Electrical insulation:** Class I  
**Distance to the sensor:** 10-50 cm (with possibility of regulation)  
**Consumption:** maximum of 10.6 A  
**Sound level at 2 meters:** 70 dBA  
**Projection protection index:** IPX1  
**Dimensions:** 240 height x 265 width x 210 depth (mm)  
**Total net weight:** 5.5 kg  
**Electrical motor protection:** Fuse  
**Electrical protection of the resistor:** Internal thermostat  
**Estimated drying time:** 28 seconds

### Dimensional drawing

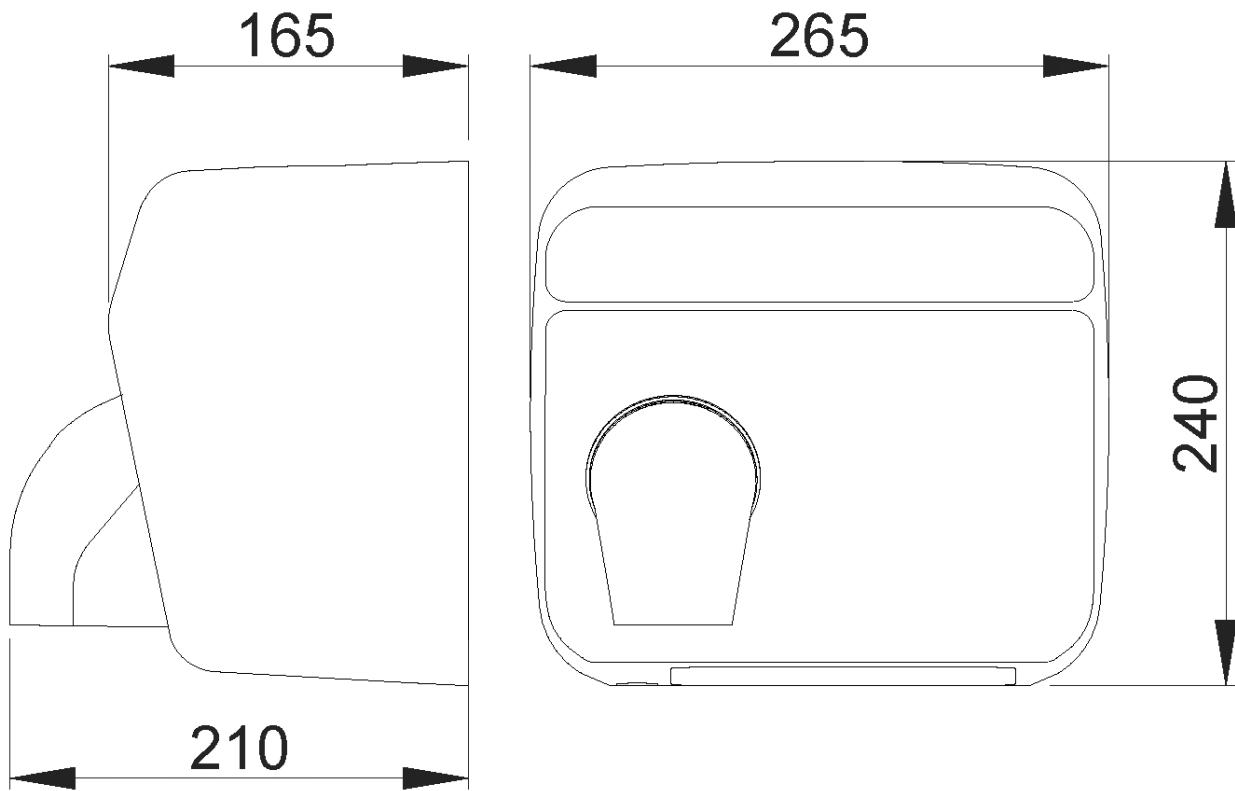

Ctra. Laureà Miró, 385-387  
08980 | Sant Feliu de Llobregat,  
Barcelona - Spain  
T. +34 934 742 423  
F. +34 934 743 548  
nofer@nofer.com  
www.nofer.com

RELATED  
PRODUCTS



01100.B



01100.S



01100.W

These specifications may be modified and/or amended due to manufacturing requirements.