



Wall-mounted emergency eyewash with manual side lever. Zinc plated steel with epoxy paint coating and polypropylene.

Description

- Emergency eyewash, manual opening.
- With height flow at low pressure.
- Activated through side lever.
- Double aerated jet with dust cover.
- Green color RAL 6029.
- Suitable for industries, laboratories and generally where there is a risk of personal injury from fire, acids, chemical reagents, petroleum products, radioactive materials or other contaminants.
- CE conformity.


Suggested text for prescription

NOFER wall-mounted emergency eyewash or equivalent, height flow at low pressure with full flow valve, instantaneous automatic opening and automatic manual closing by means of a side lever. Body made of galvanized steel with green epoxy paint coating, green polypropylene eye-washing tank. With integrated alarm system.

Technical characteristics

Body material: Galvanized steel
Coating: green epoxy paint
Color: green
Collector material: Green polypropylene
Material connecting parts: brass
Flow rate: 14 l/min ± 10%.
Minimum flow rate required at 2 bar: 6 l/min
Water inlet: 1 + 1/4 " thread
Water outlet: 1 + 1/4 " thread

Dimensional drawing

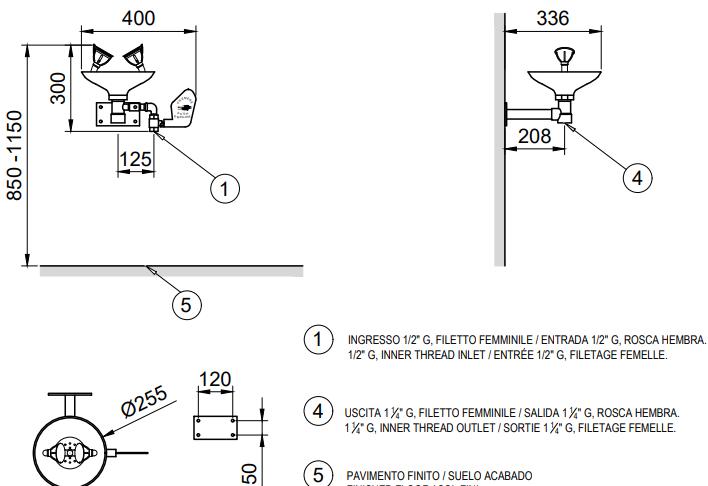

These specifications may be modified and/or amended due to manufacturing requirements.