



Wall-mounted liquid soap dispenser with laser activation. Power supply only by electric current

#### Description

- Automatic liquid soap dispenser for washbasin in polished chrome-plated brass.
- Suitable for areas with high frequency of use and high hygienic requirements.
- Wall-mounted model.
- Opening by laser sensor.
- Powered by electric current.
- Robust vandal-resistant construction in polished chrome-plated brass.
- Supplied with fasteners and accessories.
- Suitable for liquid soap or hand sanitizer (7.5%).

#### Suggested text for prescription

NOFER 03313.220.B automatic soap dispenser for wall installation, activated by a laser sensor incorporated in the dispenser. The dispenser is powered by 220V 50/60 Hz electricity. The body is made of chrome-plated cast brass in accordance with EN248 standard. Includes all accessories for installation. Dimensions: Ø34 x 190 depth (mm).

#### Components

- Plastic components in POM and ABS.
- Activation by laser sensor.
- Adjustable maximum operating time.
- CE. Complies with the European Directives for Electrical Safety 2014/35/EU, Electromagnetic Compatibility EMC 2014/30/EU and Construction Products 305/2011/UE according to EN817:2008 and EN 15091:2013.

#### Operation

Place your hands under the dispenser. It activates automatically, remaining in operation as long as the hands are within the sensor field. Adjustable maximum operating time.

#### Technical characteristics

**Material:** Brass CW617N chrome-plated

**Finishing:** polished

**Power supply:** Connection to the power grid

**Voltage/Frequency:** AC 220V - 50/60Hz / DC6V

**Capacity:** 1500 mL. Refillable (Optional 3200 mL).

**Sensor detection range:** from 5 to 23 cm

**Soap viscosity:** 100 - 3800 cPs

**Standard soap discharge:** 0.8 cc, adjustable


**Dimensions:** Ø34 x 190 depth (mm)

**Consumption in standby:** <2 mA

#### Maintenance

Use pH-neutral soap and water for cleaning, then dry with a clean cloth. When cleaning the bathroom with aggressive products, the soap dispenser should be protected from splashes.

#### Images

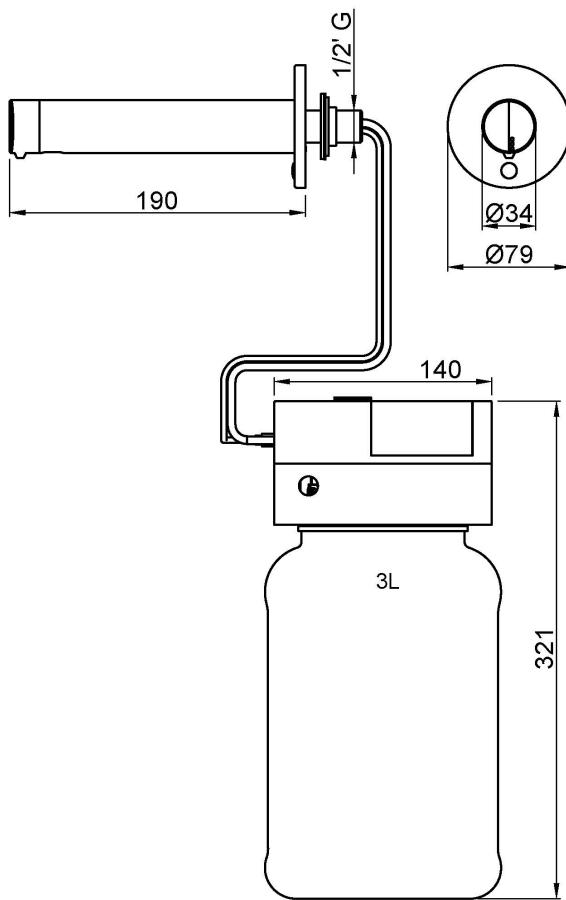


 Ctra. Laureà Miró, 385-387  
 08980 | Sant Feliu de Llobregat,  
 Barcelona - Spain  
 T. +34 934 742 423  
 F. +34 934 743 548  
 nofer@nofer.com  
 www.nofer.com

RELATED  
PRODUCTS



03023.S



03113.B



03114.B

These specifications may be modified and/or amended due to manufacturing requirements.